





8DL $\Phi 8.0 \times 6$ RoHS Compliant



陶瓷气体放电管 Ceramic Gas Discharge Tube

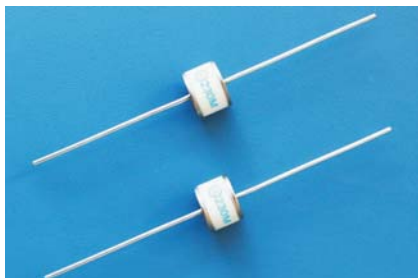

目录编号 Catalog No.	直流击穿电压 DC Spark Over Voltage (100v/s) V	冲击击穿电压 Impulse Spark Over Voltage (1kv/ μ s) V	绝缘电阻 Insulation Resistance G Ω	极间电容 Electrode Capacitance 1MHz 0.5V PF	耐短波电流 Impulse Discharge Current (8/20 μ s 10 times)	耐交流电流 AC Discharge Current (50Hz 1s 10 times) A
8DL075M	075 \pm 20%	\leq 600	\geq 1	\leq 1.5	10KA	10A
8DL090M	090 \pm 20%	\leq 600	\geq 1	\leq 1.5	10KA	10A
8DL150M	150 \pm 20%	\leq 600	\geq 1	\leq 1.5	10KA	10A
8DL230M	230 \pm 20%	\leq 700	\geq 1	\leq 1.5	10KA	10A
8DL350M	350 \pm 20%	\leq 1000	\geq 1	\leq 1.5	10KA	10A
8DL420M	420 \pm 20%	\leq 1000	\geq 1	\leq 1.5	10KA	10A
8DL470M	470 \pm 20%	\leq 1200	\geq 1	\leq 1.5	10KA	10A
8DL600M	600 \pm 20%	\leq 1400	\geq 1	\leq 1.5	10KA	10A
8DL800M	800 \pm 20%	\leq 1600	\geq 1	\leq 1.5	10KA	10A
8DL1000L	1000 \pm 20%	\leq 1900	\geq 1	\leq 1.5	5KA	10A
8DL1500L	1500 \pm 20%	\leq 2500	\geq 1	\leq 1.5	5KA	10A
8DL2000L	2000 \pm 20%	\leq 3500	\geq 1	\leq 1.5	5KA	10A
8DL2500L	2500 \pm 20%	\leq 4000	\geq 1	\leq 1.5	5KA	10A
8DL3000L	3000 \pm 20%	\leq 4500	\geq 1	\leq 1.5	5KA	10A
8DL3600L	3600 \pm 20%	\leq 5000	\geq 1	\leq 1.5	5KA	10A

认证 Approvals	电压范围 Voltage Range	证书号 Certificate No.
	75V~800V	E365642
	600V/3600V	E492581

- 参考执行标准: ITU-T K.12, GB/T9043-2008 《通信设备过电压保护用气体放电管通用技术条件》。
Reference executive standard: ITU-T K.12, GB/T9043-2008 《General Technical Requirements of Gas Discharge Tubes for the Over-voltage protection of telecommunications installations》.
- 耐交流 (50 Hz) 电流最大10A, 试验时交流电压应大于直流击穿电压上限值。
The maximum AC withstand current (50 Hz) is 10A and AC voltage shall be larger than the upper limit value of DC spark-over voltage during the test.
- 极间电容测试频率为1MHz, 测试电压为0.5V。
The electrode capacitance test frequency is 1MHz and test voltage is 0.5V.
- 此款放电管产品引线直径有 $\Phi 0.8$ mm和 $\Phi 1.0$ mm规格 常规产品 $\Phi 0.8$ mm引线 特殊要求产品 $\Phi 1.0$ mm引线。
The lead wire diameter of such discharge tube is $\Phi 0.8$ mm required for common products or $\Phi 1.0$ mm for special product.

工作与储存温度 Operating and Storage temperature

-40°C ~ +85°C

包装 Packaging

产品采用吸塑盒包装, 100PCS/盒, 每包装箱装4000PCS

Automaton taped 100PCS per reel, 4000PCS per carton